

FECS42-20 - for the Detection of Nitrogen Dioxide

Features:

- * High sensitivity/selectivity to NO₂
- * Quick response to NO₂
- * Linear output
- * Long life
- * Stable baseline
- * Unique leak-proof structure

Applications:


- * Portable and fixed installation NO₂ monitors
- * NO₂ detectors
- * Ventilation control for indoor parking garages

Figaro's Nitrogen Dioxide Sensor FECS42-20 is a unique electrochemical-type nitrogen dioxide sensor. Its most notable feature is its unique leak-proof structure, making it ideal for NO₂ monitors and detectors in various fields.




Sensitivity Characteristics:

Typical characteristics (linearity) of FECS42-20 (20°C) are shown below.

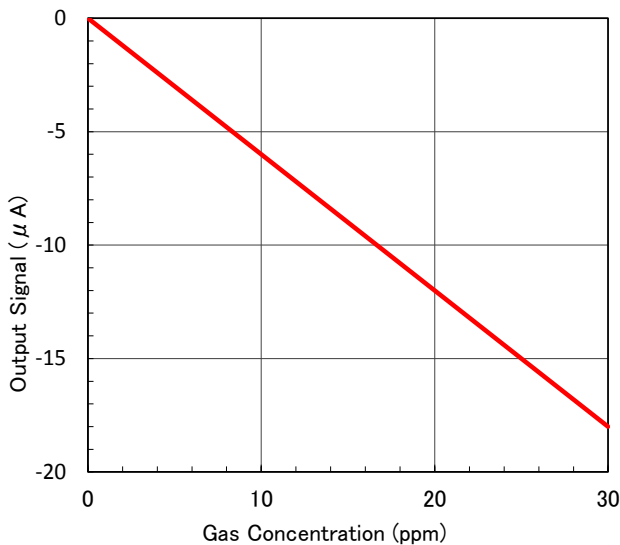

Temperature Dependency:

Typical characteristics (temperature dependency) of FECS42-20 are shown below.

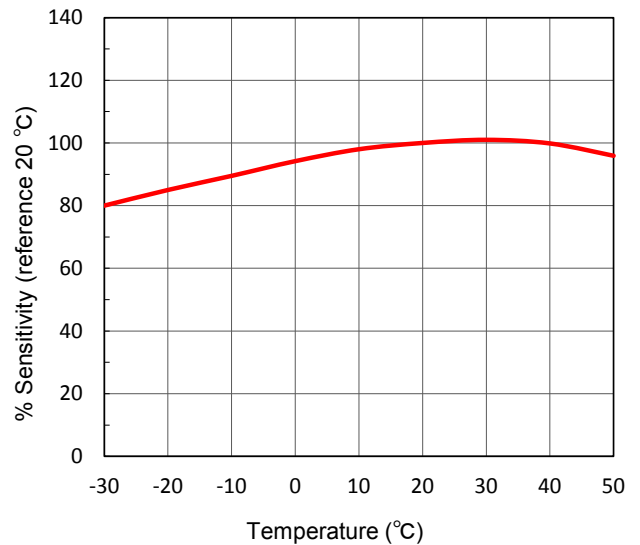


Specifications:

Detection Gas	Nitrogen Dioxide
Detection Range	0 ~ 30 ppm
Maximum Overload	150 ppm
Output Signal	-600 ± 150 nA/ppm (*)
Repeatability	±2% (*)
Resolution	0.1 ppm (*)
Typical Baseline Range (Pure air)	< ±0.2 ppm (*)
Typical Response Time (t ₉₀)	< 25 sec (*)
Baseline Shift (-20 ~ 40°C)	< 0.2 ppm(*)
Long Term Output Drift	< 2% /month (*)
Expected Life Time	> 3 years (*)
Operating Temperature	-20 ~ 50°C
Operating Humidity	15 ~ 90% RH
Operating Pressure Range	1013 hPa ±10%
Recommended Load Resistor	33Ω
Bias Voltage	Not required
Position Sensitivity	None
Recommended Storage Temp.	0 ~ 20°C
Storage Life	6 months
Cap Color	Black
Weight	4.5g (approx.)

(*) Performance data conditions: 20°C, 50%RH and 1013 hPa.

Dimensions:

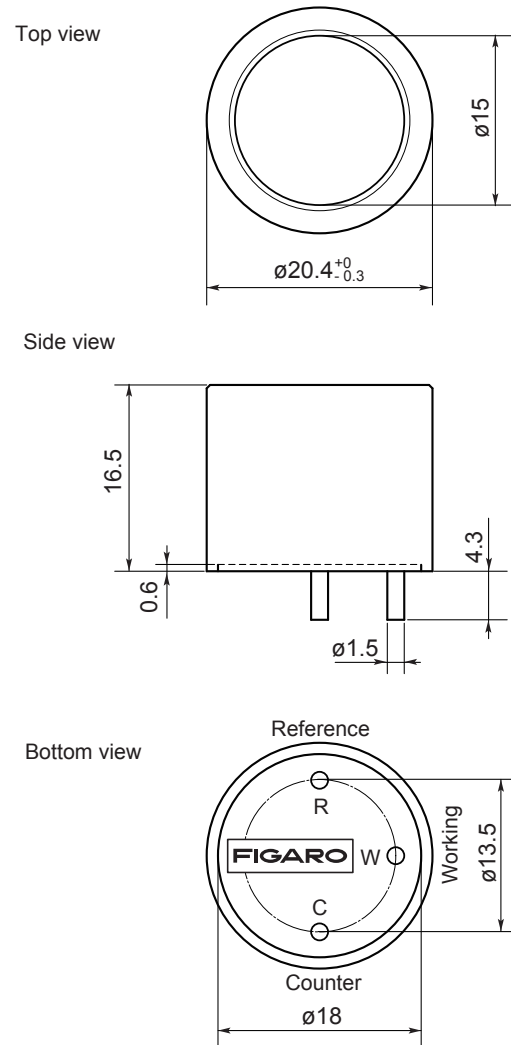

All dimensions in mm.
All tolerance ± 0.1mm unless otherwise stated.

Cross Sensitivity Data :

Table1 shows the typical response of FECS42-20 to interference gases.

Table1 Cross Sensitivity of FECS42-20 (20°C)

Gas	Concentration (ppm)	Typical Nitrogen Dioxide Concentration(ppm)Equivalent
Nitrogen Dioxide	20	20
Hydrogen	1,000	0
Carbon Monoxide	300	0
Carbon Dioxide	5,000	0
Sulphur Dioxide	20	0
Hydrogen Sulfide	10	-0.7 ~ 0.3
Nitric Oxide	30	0
Ammonia	100	0
Ethanol	100	0
Chlorine	1	1

FIGARO ENGINEERING INC.
1-5-11 Senba-nishi
Mino, Osaka 562 JAPAN
Phone: (81)-72-728-2561
Fax: (81)-72-728-0467
www.figaro.co.jp
email: figaro@figaro.co.jp