

### FECS41-250 - for the Detection of Nitric Oxide

#### Features:

- \* High sensitivity/selectivity to NO
- \* Quick response to NO
- \* Linear output
- \* Long life
- \* Stable baseline
- \* Unique leak-proof structure

#### Applications:


- \* Portable and fixed installation NO monitors
- \* NO detectors
- \* Ventilation control for indoor parking garages

Figaro's Nitric Oxide Sensor FECS41-250 is a unique electrochemical-type nitric oxide sensor. Its most notable feature is its unique leak-proof structure, making it ideal for NO monitors and detectors in various fields.




#### Sensitivity Characteristics:

Typical characteristics (linearity) of FECS41-250 (20°C) are shown below.

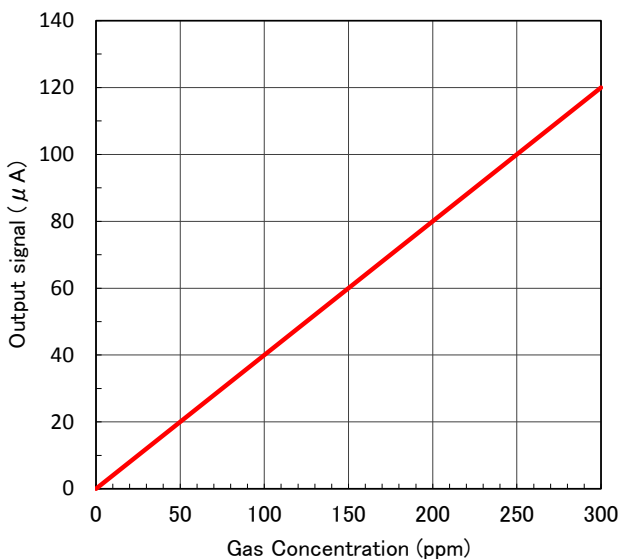

#### Temperature Dependency:

Typical characteristics (temperature dependency) of FECS41-250 are shown below.

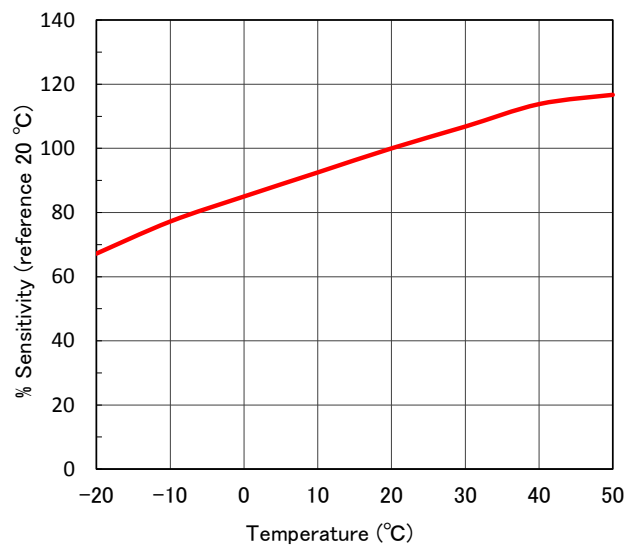

### Specifications:

Detection Gas	Nitric Oxide
Detection Range	0 ~ 300 ppm
Maximum Overload	1000 ppm
Output Signal	400 ± 80 nA/ppm (*)
Repeatability	±2% (*)
Resolution	0.5 ppm (*)
Typical Baseline Range (Pure air)	< 3 ppm (*)
Typical Response Time (t <sub>90</sub> )	< 40 seconds (*)
Typical Baseline Shift (-20 ~ 40°C)	< 4 ppm(*)
Long Term Output Drift	< 2% /month (*)
Expected Life Time	> 2 years (*)
Operating Temperature	-20 ~ 50°C
Operating Humidity	15 ~ 90% RH
Operating Pressure Range	1013 hPa ±10%
Recommended Load Resistor	10Ω
Bias Voltage	+300 mV
Position Sensitivity	None
Recommended Storage Temp.	0 ~ 20°C
Storage Life	Less than 6 months
Cap Color	Orange
Weight	4.5g (approx.)

(\*) Performance data conditions: 20°C, 50%RH and 1013 hPa.


### Cross Sensitivity Data :

Table1 shows the typical response of FECS41-250 to interference gases.

Table1 Cross Sensitivity of FECS41-250 (20°C)

Gas	Concentration (ppm)	Typical Nitric Oxide Concentration(ppm)Equivalent
Nitric Oxide	100	100
Carbon Monoxide	300	0
Carbon Dioxide	5,000	0
Hydrogen	1,000	0
Nitrogen Dioxide	5	< 1
Chlorine	10	0
Hydrogen Sulfide	15	< 4
Sulphur Dioxide	20	0
Ammonia	20	0

### Dimensions:

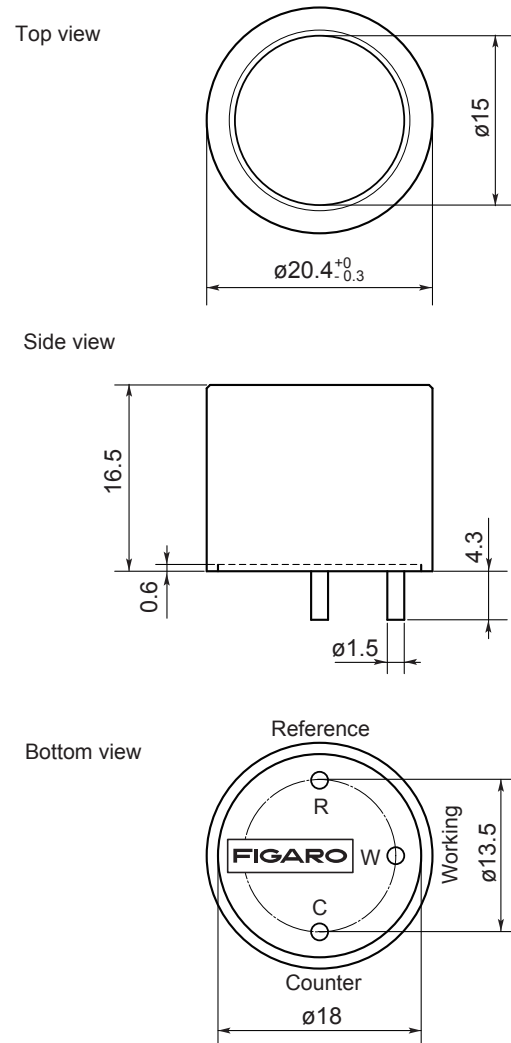

All dimensions in mm.

All tolerance ± 0.1mm unless otherwise stated.

#### FIGARO ENGINEERING INC.

1-5-11 Senba-nishi  
Mino, Osaka 562 JAPAN  
Phone: (81)-72-728-2561  
Fax: (81)-72-728-0467  
www.figaro.co.jp  
email: figaro@figaro.co.jp